


4-Way Power Dividers

For K-Band 18-20
GHz

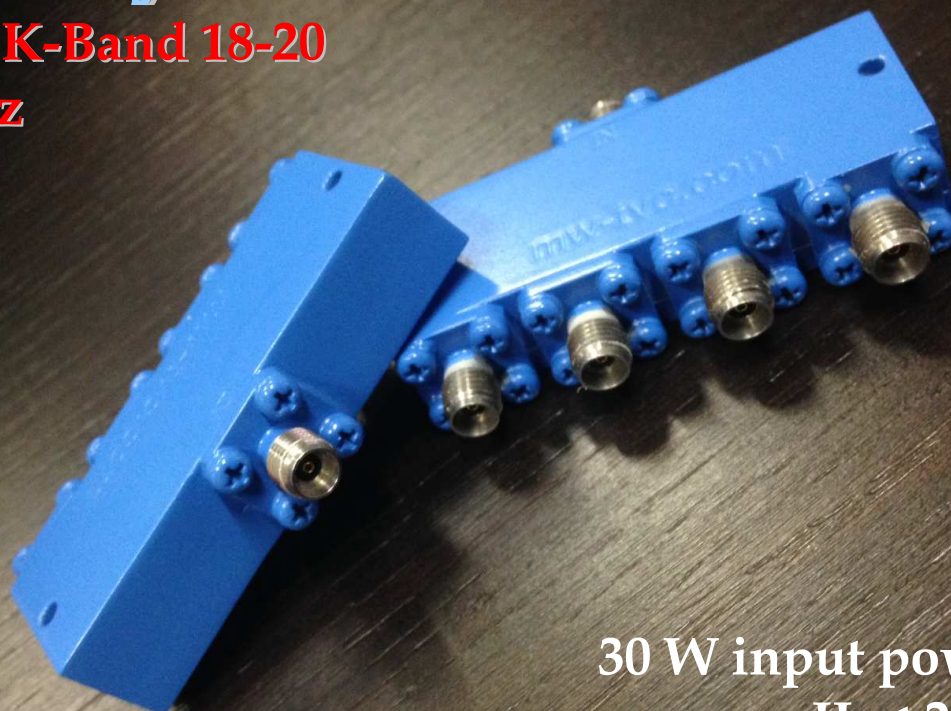

30 W input power
IL < 2 dB
VSWR 1.5 max.

Microwavefilters & TVC srl

Via G. Cavalcanti, 10 - 20063 Cernusco s/N (MI) - ITALY
Tel. +39-02-92162703 Fax. +39-02-92162705

info@mw-tvc.com www.mw-tvc.com

Microwavefilters &TVC has developed a new family of **power dividers**, which are suited for satellite applications in K-Band (18 – 20 GHz).

P/N B19250-WWWT 4-Way Power Divider

Bandwidth	18.2 – 20.3 GHz
Insertion Loss	≤ 2.0 dB
VSWR	1.5: 1 max.
Input Power	max. 30 W
Isolation	min. 12 dB
Amplitude Balance	max. 0.8 dB
Phase Balance	max. 12°
Dimensions	58.4 x 20.3 x 12.7 mm
Input / Output	2.92 (K) Female Connectors on all Ports

